

LED Filament BR20(4W)

Description:

Efficacy: 75lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification


Replacement:

40W Incandescent Bulbs

Parameters:


Material: Glass
 Input Voltage: 120/220VAC; 50/60Hz
 CCT: 2700K/4000K/6000K
 CRI: >80

View Angle: 120°
 Power Supply: Non-Isolate Drive
 Weight: 40g
 Life: 25,000 hr

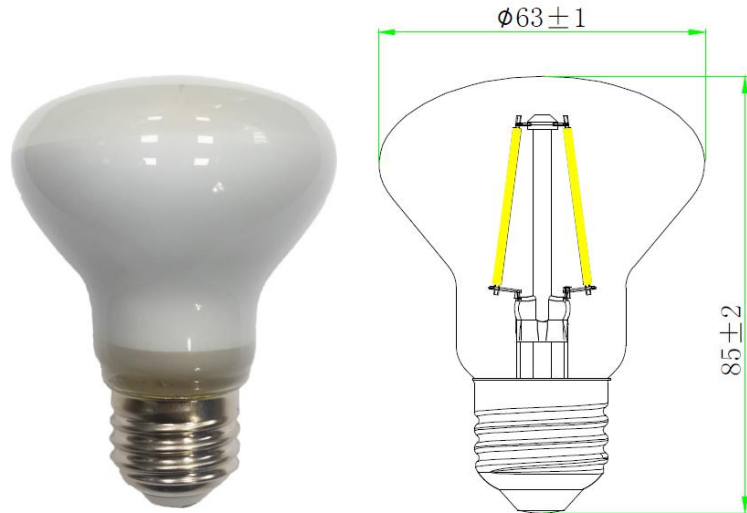

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
PA.XXA04JLBA0RU	2700K	80	320lm	90-135V/60Hz	4W	0.5	E26	NO
PA.XXA04JLBADRO	2700K	80	320lm	120V/60Hz	4.5W	0.9	E26	YES
PA.XXB04JKBA0RO	2700K	80	320lm	176-264V/50Hz	4W	0.5	E27	NO
PA.XXB04JKBADRO	2700K	80	320lm	220-230V/50Hz	4.5W	0.7	E27	YES

Packing information:

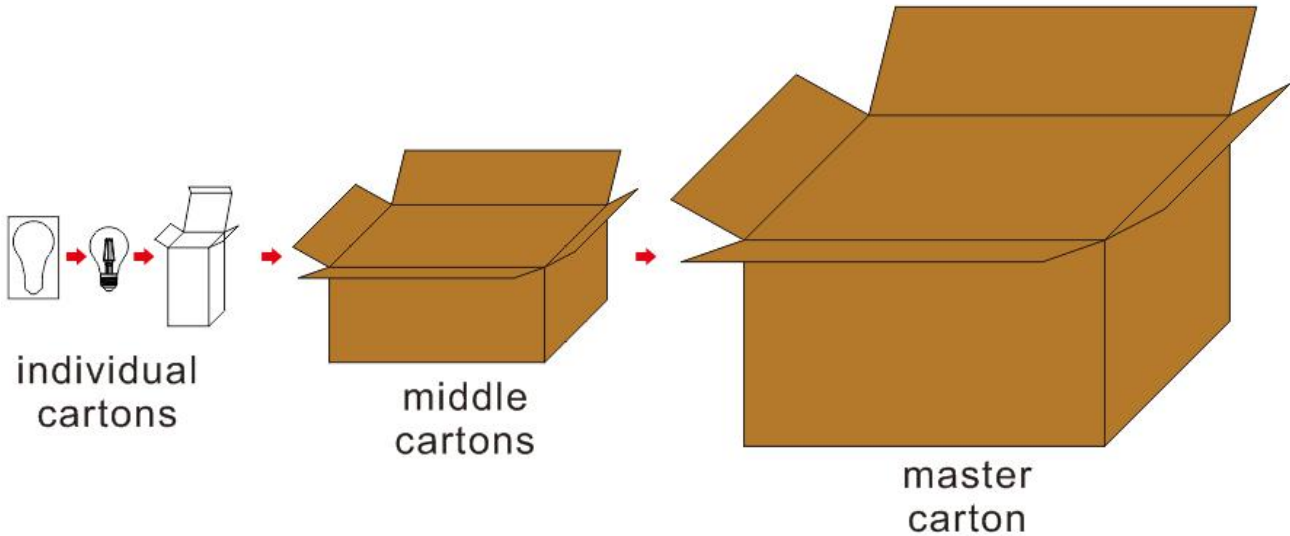

Master carton size:460*375*250mm
 Net weight:2.4kg; Gross weight:5.5kg
 15 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27 base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
 C22-6672-1LW
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH
 CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.