


LED Filament B13(6W/8W)

Description:

Efficacy: 135lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification

Replacement:

75W Incandescent Bulbs
 100W Incandescent Bulbs

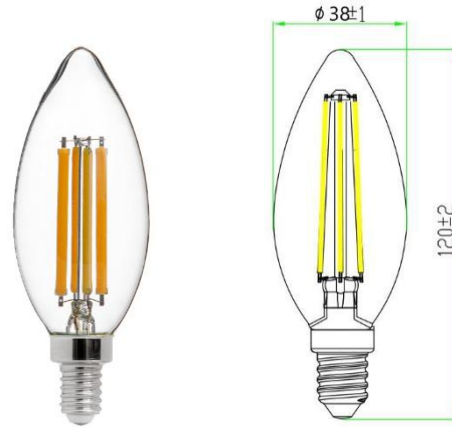


Parameters:

Material: Glass
 Input Voltage: 120/60Hz
 CCT: 2700K/4000K/6000K
 CRI: >90
 View Angle: 360°
 Power Supply: Non-Isolate Drive
 Weight: 25g
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
B13-6W	2700K	90	800lm	120V/60Hz	6W	0.9	E12	YES
B13-8W	2700k	90	1100LM	120V/60HZ	8W	0.9	E12	YES

Packing information:

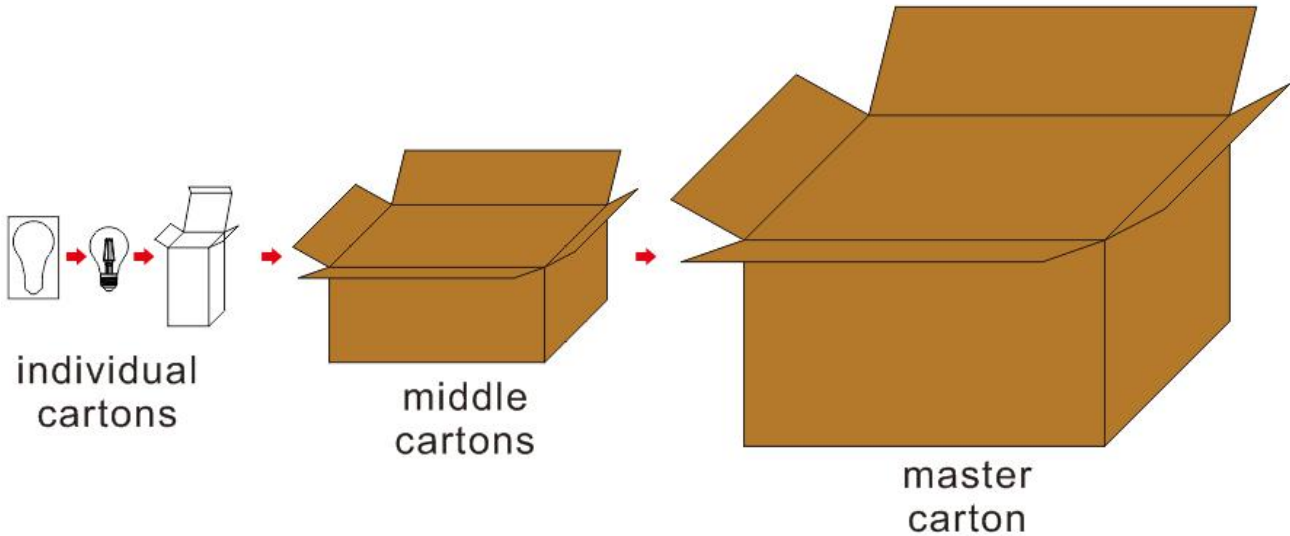

Master carton size:260*210*350mm

Net weight:2kg; Gross weight:4.5kg

15 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27/E12/E14base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
C22-6672-1LW
R70-6631-1LW

LUTRON:

DV-600P-WH
MACL-153MR-WH
CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
R70-6631-1LW

LUTRON:

DV-600P-WH
MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.